
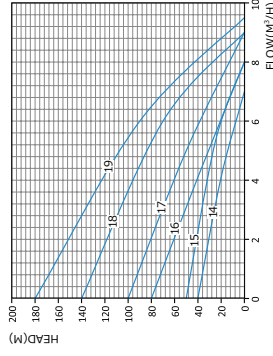
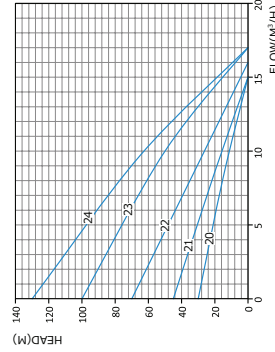
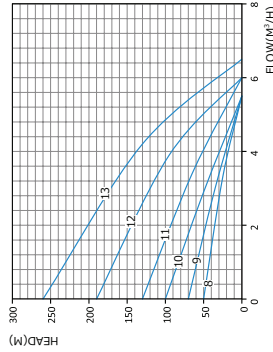


4" 6" DC SS IMPELLER SOLAR PUMP

Material Of Pump

- Outlet/connection fitting: 304 stainless steel
- Cylinder: brass/stainless steel
- Pump body: 304 stainless steel
- Impeller: 304 stainless steel
- Pump cable: 2M
- Oil cooling
- DC MPPT function controller
- 2 years warranty

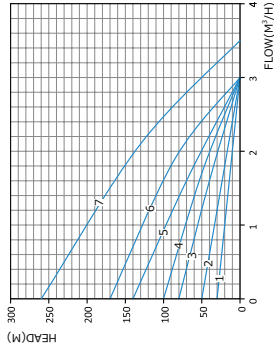

ITEM		DC VOLTAGE (V)	BEST INPUT VOLTAGE VOC (V)	POWER (W)	MAX FLOW (M³/H)	MAX HEAD (M)	OUTLET (INCH)
1	4PSS3.0/30-24/300	24	11~55	300	3.0	30	1.25"
2	4PSS3.0/50-48/400	48	45~150	400	3.0	50	1.25"
3	4PSS3.0/80-72/600	72	60~150	600	3.0	80	1.25"
4	4PSS3.0/100-96/750	96	60~200	750	3.0	100	1.25"
5	4PSS3.0/140-144/1100	144	90~340	1100	3.0	140	1.25"
6	4PSS3.0/170-192/1500	192	90~430	1500	3.0	170	1.25"
7	4PSS3.5/260-280/2200	280	100~490	2200	3.5	260	1.25"
8	4PSS5.5/50-72/600	72	60~150	600	5.5	50	1.25"
9	4PSS5.5/70-96/750	96	60~200	750	5.5	70	1.25"
10	4PSS5.5/100-144/1100	144	90~340	1100	5.5	100	1.25"
11	4PSS6.0/130-192/1500	192	90~430	1500	6.0	130	1.25"
12	4PSS6.0/190-280/2200	280	100~490	2200	6.0	190	1.25"
13	4PSS6.5/260-385/3000	385	100~750	3000	6.5	260	1.25"
14	4PSS7.0/40-72/600	72	60~150	600	7.0	40	1.5"
15	4PSS8.0/50-96/750	96	60~200	750	8.0	50	1.5"
16	4PSS8.0/80-144/1100	144	90~340	1100	8.0	80	1.5"
17	4PSS9.0/100-192/1500	192	90~430	1500	9.0	100	1.5"
18	4PSS9.0/140-280/2200	280	100~490	2200	9.0	140	1.5"
19	4PSS9.5/180-385/3000	385	100~750	3000	9.5	180	1.5"
20	4PSS15.0/30-96/750	96	60~200	750	15.0	30	2"
21	4PSS15.0/45-144/1100	144	90~340	1100	15.0	45	2"
22	4PSS16.0/70-192/1500	192	90~430	1500	16.0	70	2"
23	4PSS17.0/100-280/2200	280	100~490	2200	17.0	100	2"
24	4PSS17.0/130-385/3000	385	100~750	3000	17.0	130	2"
25	4PSS21.0/40-192/1500	192	90~430	1500	21.0	40	2"
26	4PSS21.0/60-280/2200	280	100~490	2200	21.0	60	2"
27	4PSS23.0/65-385/3000	385	100~750	3000	23.0	65	2"
28	4PSS28/55-385/3000	385	100~750	3000	28.0	55	2"
29	6PSS25.0/30-192/1500	192	90~430	1500	25.0	30	3"
30	6PSS25.0/45-280/2200	280	100~490	2200	25.0	45	3"
31	6PSS30.0/55-385/3000	385	100~750	3000	30.0	55	3"
32	6PSS40.0/30-385/3000	385	100~750	3000	40.0	30	3"