



ASTRONERGY



**Solar Europe
Importers**

info@solar-europe.co.za
www.solar-europe.co.za
087 654 4800

ASTRO N5


CHSM72N(DG)/F-BH
Bifacial Series(182)

560~580W

Warranty

15 15-year Product Warranty

30 30-year Linear Power Warranty

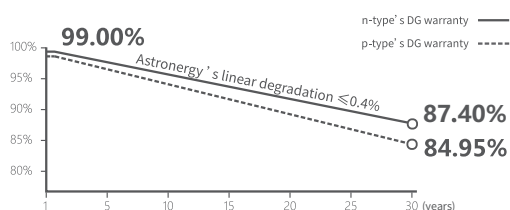

Key Features

- TOPCon / Half-cut
- Low temperature coefficient (Pmpp)
- Non-destructive cutting
- PID resistance
- Low BOS cost & LCOE
- Bifacial gain



ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1
BloombergNEF



560~580W

POWER RANGE

0~+5W

POWER SORTING


22.5%

MAX MODULE
EFFICIENCY $\leq 1.0\%$ FIRST YEAR
POWER DEGRADATION $\leq 0.4\%$ YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	2278 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	144 (6*24)
Frame technology	Aluminum, silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	32.1 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1207 kg
Modules per 40' HQ container	720 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

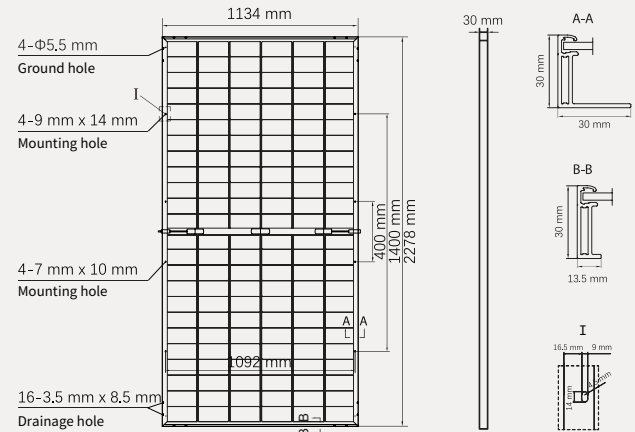

Electrical Specifications

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

Rated output (P _{mp} / Wp)	560	565	570	575	580
Rated voltage (V _{mp} / V)	42.44	42.61	42.77	42.94	43.11
Rated current (I _{mp} / A)	13.20	13.26	13.33	13.39	13.45
Open circuit voltage (V _{oc} / V)	50.50	50.70	50.90	51.10	51.30
Short circuit current (I _{sc} / A)	13.93	14.02	14.10	14.19	14.28
Module efficiency	21.7%	21.9%	22.1%	22.3%	22.5%

NMOT: Irradiance 800W/m², Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

Rated output (P _{mp} / Wp)	421.1	424.9	428.6	432.4	436.2
Rated voltage (V _{mp} / V)	39.94	40.10	40.26	40.42	40.59
Rated current (I _{mp} / A)	10.54	10.60	10.65	10.70	10.75
Open circuit voltage (V _{oc} / V)	47.97	48.16	48.35	48.54	48.73
Short circuit current (I _{sc} / A)	11.25	11.32	11.39	11.46	11.53

Electrical Specifications (Integrated power)

P _{mp} gain	P _{mp} / Wp	V _{mp} / V	I _{mp} / A	V _{oc} / V	I _{sc} / A
5%	599	42.77	13.99	50.90	14.10
10%	627	42.77	14.66	50.90	15.48
15%	656	42.78	15.32	50.91	16.18
20%	684	42.78	15.99	50.91	16.88
25%	713	42.78	16.65	50.91	17.58

Electrical characteristics with different rear power gain (reference to 570W)


Temperature Ratings (STC)

Operating Parameters


Temperature coefficient (P _{mp})	-0.29%/°C	No. of diodes	3
Temperature coefficient (I _{sc})	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (V _{oc})	-0.25%/°C	Max. series fuse rating	30 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V _{DC}

Curve

Current-Voltage (570W)

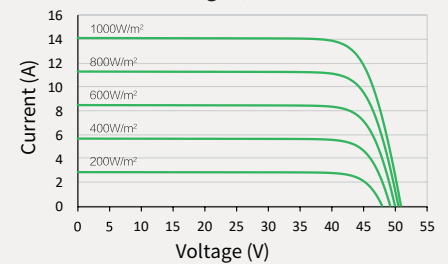

Power-Voltage (570W)

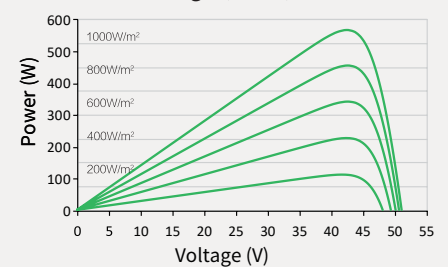

Current-Voltage (570W)

